


FRONTLINE

LED RGB

TYPE:

PROJECT NAME:

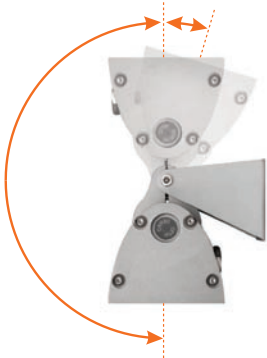

MODEL #	FINISH	VOLTAGE
---------	--------	---------

DESCRIPTION

Features

- Extruded aluminium housing with Die cast aluminium end caps, Silicone gasket.
- Tempered glass hinged to the housing, Breather device and Stainless steel external screws.
- Polyester powder paint resistant to outdoor atmospheric conditions.
- 4 Weather proof cable entries (2 for electrical and 2 for signal) for the purpose of cascade connection.
- Accessories for pendant/ surface mounted adjustable/ extendable arms in die cast aluminium and/ or steel.
- Modules in Dimmable versions are available upon request.
- IP65 rated.


Applications

- FRONTLINE is functional and scene-controlled interactive graphic flood light system. With a flexible installation system for singular installation or in a continuous row, it can be oriented for light direction control. The simple shape is designed to enhance the architectural statement.
- Application areas: Building facades, under canopy, exterior or interior, residential or commercial.

FRONTLINE LED RGB



(L143195/L143196/L143197)

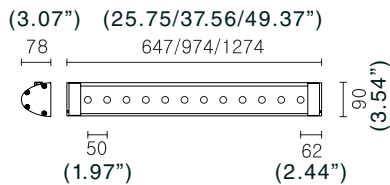

- L143195** - 36W 12 LED (Full Color RGB) 
- L143196** - 54W 18 LED (Full Color RGB) 
- L143197** - 72W 24 LED (Full Color RGB) 

IP65   

Inclusive of Integral Control Unit with 220-240V 50/60Hz Electronic power supply and DMX signal converter with facility to connect In-Out cables for multiple connections. (Occupies 3 control channels.)


With a DMX switchboard that you can purchase separately from the market (or order our Art. 2975)

you can control many more fittings, completely controlling scenes, speeds and color sequences.

SPECIFICATION SHEET

LEDOLOGY®



ACCESSORIES



MOUNTING BRASKETS

L2379 - (2pcs) Adjustable



Available in colours Grey(for outdoor use)



MOUNTING BRASKETS

L2380 - (2pcs) Adjustable



Available in colours Grey(for outdoor use)



MOUNTING BRASKETS

L2380 - (2pcs) Adjustable and Extensions



Available in colours Grey(for outdoor use)

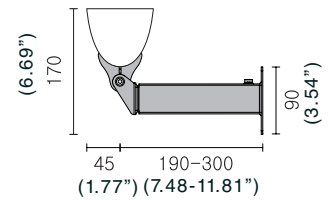

SUSPENSION SET

L2382 - With 2 wire hangers of 1500mm and a power supply cable

Available in colours Grey(for outdoor use)






POLE MOUNTED BRASKET SET with connector for one fixture

L2394 - Pole Dia. 102mm

L2395 - Pole Dia. 120mm

Available in colours Grey(for outdoor use)


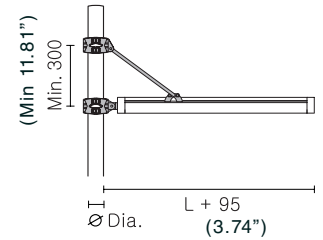


POLE MOUNTED BRASKET SET with connector for two fixture

L2565 - Pole Dia. 102mm

L2566 - Pole Dia. 120mm


Available in colours Grey(for outdoor use)

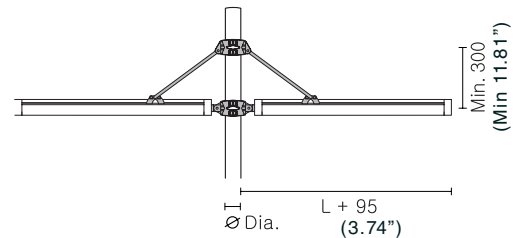

WALL MOUNTED SET

L2567

Available in colours Grey(for outdoor use)

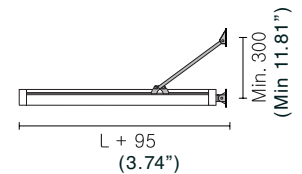


FRONTLINE

ACCESSORIES

TYPE:

PROJECT NAME:



ACCESSORIES



BILLBOARD SET for one banner

- L2568 - Pole Dia. 102mm
- L2569 - Pole Dia. 120mm


Available in colours Grey(for outdoor use)

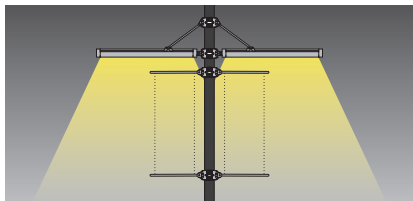

BILLBOARD SET for two banner

- L2570 - Pole Dia. 102mm
- L2571 - Pole Dia. 120mm


Available in colours Grey(for outdoor use)



DMX SWITCHBOARD

- L2478 - Length: 1000
- Power supply : 220-240V 50/60Hz
Installation : Plastic recessing box included
IP rate : IP 40
Control signal : DMX512
Control channel : 60 channel

Programmable DMX switchboard that allow you to control 20 groups of individual fittings that requires 3 Control Channels.
Every group for use of many fittings.

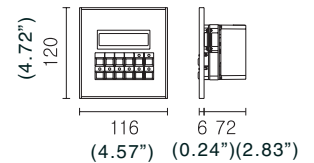

IP65 EXTENSION SIGNAL CABLE for RGB with M/F connector

- L2478 - Length: 1000
- L2479 - Length: 2000

SPECIFICATION SHEET

METAL FINISH 29. GREY(OUTDOOR)

VOLTAGE 120V 220V 277V

LEDOLOGY®

WWW.LEDOLOGY.COM